


鑽孔機 >>>

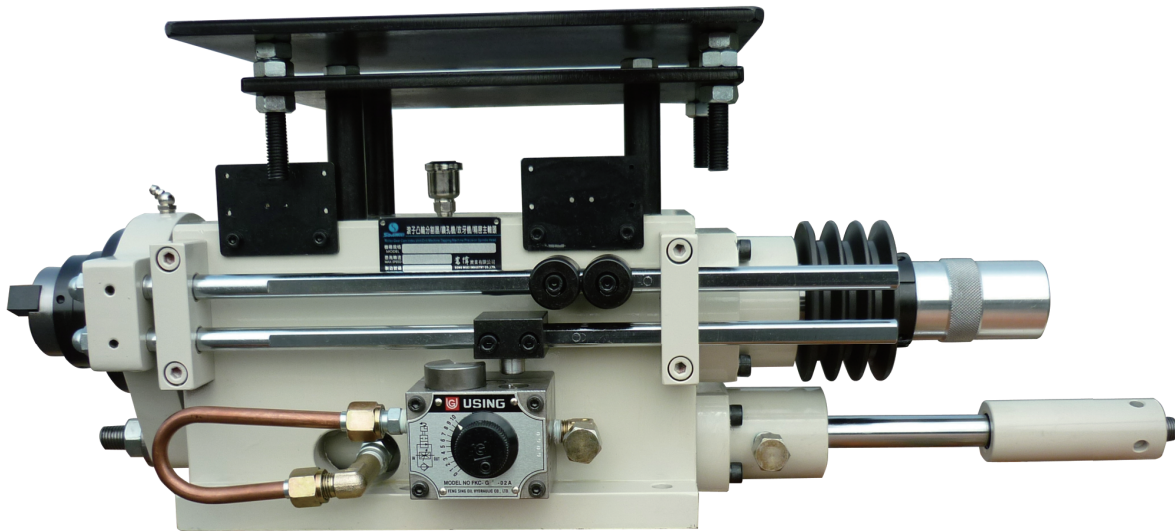

SWD65-100

鑽搪主軸頭 Drilling & boring Spindle Units

規格 Norms	Model	SWD65-100	SWD65H-100
鑽孔能力	Max. Drilling Capacity	鑽孔φ25 搪孔φ45(S45C)	
最大行程	Max. Stroke	100mm	
容許轉速	Spindle Max. Speed	2000RPM	5000RPM
使用壓力	Working Pressura	液壓(H)20-25kg/cm ²	
油缸直徑	Cylinder Bore	φ40	
缸徑面積	Cylinder Diameter	進給(F)9.42cm ² 復歸(B)9.42cm ²	
容許馬力	Maximum use of motor	2.25KW(3HP)	
傳動規格	Transmission Wheel Type	Ax3-ODφ98 HTD-8M-40T	
淨重	Net Weight	72kg	72kg
耗材 Consumables			
主軸軸承	Spindle Bearing	32006-2 6006ZZ-2	7006-4
皮帶輪軸承	Pulley Bearing	6008Z-2	
活塞油封	Piston Seal (Oil pressure)	液壓 USH30-2 USH20-2 DH20-1	
主軸油封	Spindle Oil Seal	VA-38-1	
前蓋油封	Front Cover Oil Seal	TC70x90x12-1	
	Oilless Slide Bearings	DU-14x20 -4(自潤軸承)	

